


Ref #	Hits	Search Query	DBs	Default Operator	Plurals	Time Stamp
L1	226	single endpoint	US-PGPUB; USPAT; EPO; JPO	ADJ	OFF	2005/11/07 11:40
L2	5	hub same l1	US-PGPUB; USPAT; EPO; JPO	ADJ	OFF	2005/11/07 11:42
L3	9	"6633998".pn. or "6587898".pn. or "6574709".pn. or "6553408". pn. or "6519678".pn. or "6445704".pn. or "6282671".pn. or "6282670".pn. or "6044428". pn.	US-PGPUB; USPAT; EPO; JPO	ADJ	OFF	2005/11/07 11:49
L4	193	endpoint same hub	US-PGPUB; USPAT; EPO; JPO	ADJ	OFF	2005/11/07 12:00
L5	65	virtual endpoint	US-PGPUB; USPAT; EPO; JPO	ADJ	OFF	2005/11/07 12:00
L6	3	hub same l5	US-PGPUB; USPAT; EPO; JPO	ADJ	OFF	2005/11/07 12:03
L7	2151	usb same hub	US-PGPUB; USPAT; EPO; JPO	ADJ	OFF	2005/11/07 12:03
L8	5	l5 and l7	US-PGPUB; USPAT; EPO; JPO	ADJ	OFF	2005/11/07 12:03
L9	15	("5675813" "5778218" "5784581" "5799196" "5818948" "5835791" "5871368" "5884086" "5890015" "5974486").PN. OR ("6230226").URPN.	US-PGPUB; USPAT; USOCR	ADJ	OFF	2005/11/07 12:26
L10	5780	single function	US-PGPUB; USPAT; EPO; JPO	ADJ	OFF	2005/11/07 12:26
L11	12	hub same l10	US-PGPUB; USPAT; USOCR	ADJ	OFF	2005/11/07 12:32
L12	28	l7 and l10	US-PGPUB; USPAT; EPO; JPO	ADJ	OFF	2005/11/07 12:32
L13	22	l12 not l11	US-PGPUB; USPAT; EPO; JPO	ADJ	OFF	2005/11/07 12:32

L14	11	virtual\$4 near4 single function	US-PGPUB; USPAT; EPO; JPO	ADJ	OFF	2005/11/07 12:43
L15	647	compound device	US-PGPUB; USPAT; EPO; JPO	ADJ	OFF	2005/11/07 12:35
L16	8	(l1 or l10) and l15	US-PGPUB; USPAT; EPO; JPO	ADJ	OFF	2005/11/07 12:36
L17	5	appear near3 (l1 or l10)	US-PGPUB; USPAT; EPO; JPO	ADJ	OFF	2005/11/07 12:37
L18	22	appear\$4 near3 (l1 or l10)	US-PGPUB; USPAT; EPO; JPO	ADJ	OFF	2005/11/07 12:37
L19	13	(usb or hub) and l18	US-PGPUB; USPAT; EPO; JPO	ADJ	OFF	2005/11/07 12:43
L20	14	virtual\$4 near4 (l1 or l10)	US-PGPUB; USPAT; EPO; JPO	ADJ	OFF	2005/11/07 12:43
L21	12	l20 not l14	US-PGPUB; USPAT; EPO; JPO	ADJ	OFF	2005/11/07 12:44
L22	38	(hub or usb) and l1	US-PGPUB; USPAT; EPO; JPO	ADJ	OFF	2005/11/07 12:45

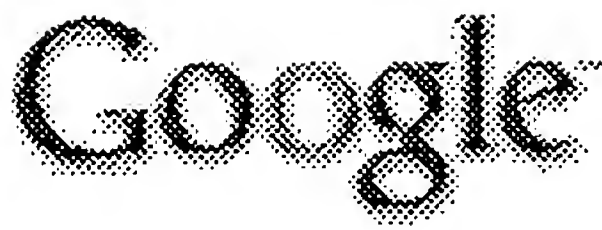

Web · Images · Groups · News · Froogle · Local^{New!} · [more »](#)

endpoint hub

Search

[Advanced Search](#)
[Preferences](#)

Web

Results 11 - 20 of about 171,000 for endpoint hub. (0.20 seconds)

linux on vaio pcg-tr1

82801DB USB (**Hub #1**) (rev 03) 00:1d.1 USB Controller: Intel Corp. ... bInterfaceClass
9 **Hub** bInterfaceSubClass 0 bInterfaceProtocol 0 iInterface 0 **Endpoint** ...

www.afromania.org/~k-ozaki/linux/pcg-tr1/ - 16k - [Cached](#) - [Similar pages](#)

jUSB: Java USB

interface 0 is claimed by: **hub** driver → <**hub** number='0' alt='0' endpoints='1'
class='9' subclass='0' protocol='0'> <**endpoint** addr='1' direction='in' ...

jusb.sourceforge.net/?selected=tree - 15k - [Cached](#) - [Similar pages](#)

Java USB: Class Hub

Because the kernel **hub** driver claims exclusive access to the **hub** interrupt
endpoint (the **hub** "status change pipe"), user mode programs don't have direct ...

jusb.sourceforge.net/apidoc/usb/core/Hub.html - 33k - [Cached](#) - [Similar pages](#)

Bus 004 Device 001: ID 0000:0000 Device Descriptor: bLength 18 ...

... 1 bcdUSB 1.10 bDeviceClass 9 **Hub** bDeviceSubClass 0 Unused bDeviceProtocol ...
0 Unused bInterfaceProtocol 0 iInterface 0 **Endpoint** Descriptor: bLength 7 ...

seehuhn.de/comp/powerbook/lsusb-2.6.13.2 - 16k - [Cached](#) - [Similar pages](#)

RedNova News - Technology - The Impact of Passenger Mix on ...

Primary **hub** equals 1 if either **endpoint** of market j is a primary **hub** (as enumerated
in Table 1) for that airline and 0 otherwise. Likewise, secondary **hub** ...

www.rednova.com/.../268654/the_impact_of_passenger_mix_on_reported_hub_premiums_in/?source=r_technology - 83k -
[Cached](#) - [Similar pages](#)

USB Complete: Enumeration

Each **hub** has an interrupt IN **endpoint** for reporting these events to the host.
... Each **hub** uses its interrupt **endpoint** to report events at the **hub**. ...

www.lvr.com/usbcenum.htm - 19k - [Cached](#) - [Similar pages](#)

Bus 004 Device 002: ID 049f:0086 Compaq Computer Corp. Device ...

... bInterfaceProtocol 1 Bluetooth iInterface 0 **Endpoint** Descriptor: bLength 7
... 1 bcdUSB 1.10 bDeviceClass 9 **Hub** bDeviceSubClass 0 Unused bDeviceProtocol ...

personal.eunet.fi/pp/joakim/nx7010/lusbv.txt - 15k - [Cached](#) - [Similar pages](#)

[doc] ISA

File Format: Microsoft Word 97 - [View as HTML](#)

The data stage is an IN control transaction from **hub endpoint** 0 □ a 4 byte payload
... The status stage is an OUT control transaction to **hub endpoint** 0 □ it ...

coen.boisestate.edu/Ssmith/BusInt/overheads/USB9.doc - [Similar pages](#)

W722 USB Hub/Compound Device Controller

Hub function supports one control **endpoint** and one interrupt **endpoint**. »

Embedded function supports 1 control **end point** and 6 additional **endpoint** addresses ...

www2.okisemi.com/site/productscatalog/prdasic/availabledocuments/Intro-1205.html - 26k - [Cached](#) - [Similar pages](#)

[PPT] USB2.0 Hub Details

File Format: Microsoft Powerpoint 97 - [View as HTML](#)

Association mechanism between data **endpoint(s)** and feedback **endpoint** ...

Bi-directional isochronous **endpoint** pair that uses the same sample clock ...

www.usb.org/developers/presentations/pres0500/Knapen_IsoSynch.ppt - [Similar pages](#)

[[More results from www.usb.org](#)]



[Web](#) [Images](#) [Groups](#) [News](#) [Froogle](#) [Local](#)^{New!} [more »](#)

endpoint hub

Search

[Advanced Search](#)
[Preferences](#)

Web

Results 1 - 10 of about 171,000 for **endpoint hub**. (0.25 seconds)

Functions

Create an **endpoint** in the controller to do bulk transactions. ... highSpeedPort:
If speed is not kUSBDeviceSpeedHigh, the **hub** port to address split ...

[developer.apple.com/.../IOUSBControllerV2/Classes/IOUSBControllerV2/Functions/Functions.html](#) - 38k - [Cached](#) - [Similar pages](#)

IOUSBControllerV2

In particular IOUSBControllerV2 indicates the high speed **hub** a full or low speed device is ... Create an **endpoint** in the controller to do bulk transactions. ...

[developer.apple.com/.../KernelIOKitFramework/](#)

[IOUSBControllerV2/Classes/IOUSBControllerV2/CompositePage.html](#) - 39k - [Cached](#) - [Similar pages](#)

[PDF] How to do File Based Decoding for USB

File Format: PDF/Adobe Acrobat - [View as HTML](#)

Now click Endpoints and assign the **hub endpoint** to the **hub** control.. I have assigned the other endpoints in the trace to other standard USB functions so ...

[www.lecroy.com/tm/library/registerPDF.asp?wp=824](#) - [Similar pages](#)

[PDF] Project 4: Pseudo USB Simulation

File Format: PDF/Adobe Acrobat - [View as HTML](#)

Use HUBDELAY generic for delay time through **hub**. **Endpoint**: ... A signal between a **hub** and an **endpoint**/root will only have 2 drivers. To resolve the two ...

[www.ee.pdx.edu/~slip/asic/ECEX81/proj4.pdf](#) - [Similar pages](#)

Bus 003 Device 001: ID 0000:0000 Virtual Hub Device Descriptor ...

... bInterfaceNumber 0 bAlternateSetting 0 bNumEndpoints 1 bInterfaceClass 9 **Hub**
bInterfaceSubClass 0 bInterfaceProtocol 0 iInterface 0 **Endpoint** Descriptor: ...

[larve.net/people/hugo/2003/02/lsusb-vv](#) - 7k - [Cached](#) - [Similar pages](#)

[PDF] Low-cost USB Hub Controller AT43301

File Format: PDF/Adobe Acrobat

The **Hub** Controller supports the following descriptors through **Endpoint** 0: Device ... and class-specific **Hub** Requests are also supported through **Endpoint** 0. ...

[www.atmel.com/dyn/resources/prod_documents/doc1137.pdf](#) - [Similar pages](#)

[PDF] USB97C102 Multi-Endpoint USB Peripheral Controller with Integrated ...

File Format: PDF/Adobe Acrobat

Multi-**Endpoint** USB Peripheral Controller with. Integrated 5 Port **HUB** ... FIGURE 3 –
USB97C102 CONFIGURED FOR MONITOR, **HUB**, AND PERIPHAL CONSTELLATION ...

[www.smsc.com/main/tools/discontinued/97c102.pdf](#) - [Similar pages](#)

IT Observer - nCircle Announces Security Intelligence Hub on Oracle

Based on a fully open architecture, the Security Intelligence **Hub** leverages **endpoint** intelligence collected by IP360 for easy integration with enterprise ...

[www.ebcvg.com/press.php?id=1723](#) - 15k - Nov 5, 2005 - [Cached](#) - [Similar pages](#)

Information on the Universal Serial Bus, Part I

The source of the power to a USB device can come from the host, a **hub**, or the device can ... An **endpoint** can be as simple as an addressable single register, ...


[www.sss-mag.com/usb.html](#) - 32k - [Cached](#) - [Similar pages](#)

[PPT] www.usb.org/developers/presentations/pres0501/Froe...

File Format: Microsoft Powerpoint 97 - [View as HTML](#)

Attempt Transaction For Cleared **Endpoint**. TT and **Hub** Test Specification Rev .91
... **Hub** Port. **EndPoint**. Test Device. **EndPoint**. Stack Interface. MS USBDI ...

[Similar pages](#)

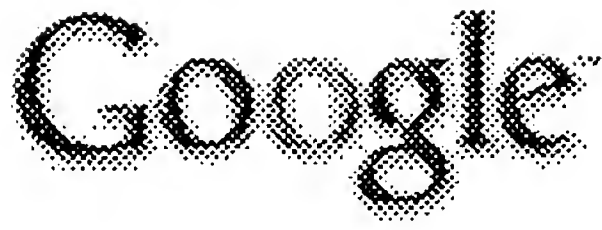

[Web](#) [Images](#) [Groups](#) [News](#) [Froogle](#) [Local](#)^{New!} [more »](#)

endpoint hub

Search

[Advanced Search](#)
[Preferences](#)

Web

Results 21 - 30 of about 171,000 for endpoint hub. (0.13 seconds)

CompoTech Asia—CATALOG INDEX

... **HUB** Upstream Connectivity; **HUB** Resume Connectivity; **HUB** Repeater State;
HUB Endpoint組織; USB **HUB** Descriptor; **HUB** Device Descriptor; **HUB** Configuration ...

www.compotech.com.tw/book/USB002.php - 27k - [Cached](#) - [Similar pages](#)

Genesys Products

¡EOne interrupt **endpoint** for **hub**. ¡ETwo 8 byte FIFO for **hub** control endpoints
and peripheral function. ¡ETwo **endpoint** for device function with 64 bytes FIFO ...

www.genesyslogic.com/econtents/product02.asp?minicid=4&lastcid=16&SN=43 - 28k - [Cached](#) - [Similar pages](#)

Genesys Products

• One interrupt **endpoint** for **hub**. • Two 8 byte FIFO for **hub** control endpoints and
peripheral function. • Two **endpoint** for device function with 64 bytes FIFO ...

www.genesyslogic.com/contents/product02.asp?minicid=4&lastcid=16&SN=43 - 27k - [Cached](#) - [Similar pages](#)

[PDF] HBCU-5710r Dec11

File Format: PDF/Adobe Acrobat - [View as HTML](#)

w/**End Point**. Support. PCI-E. PCI-E. Cache. Memory. Controller. **Hub**. Microprocessor.
FSB. Fibre Channel. Host Connect. PCI-E **Endpoint**. Fibre Channel/Other ...

www.home.agilent.com/cgi-bin/pub/agilent/reuse/cp_DocumentRedirector.jsp?LANGUAGE_CODE=eng&ID=spg%3A7... -

[Similar pages](#)

Project Labrador - Web Services Hub

Its focus is to be a simple, and easily configured Web Services **Hub** that allows
... Labrador already has three endpoints, a standard Servlet **endpoint**, ...

www.dbxml.com/labrador/ - 22k - [Cached](#) - [Similar pages](#)

USB2.0 external hub and ehci question

When I connect the external **hub** in its place, I get the error that the > > port

... cypress hubs stall the controll **endpoint** without a reason when running ...

lists.freebsd.org/pipermail/freebsd-hackers/2003-November/003978.html - 5k - [Cached](#) - [Similar pages](#)

[PDF] Self- and Bus- powered USB Hub Controller AT43312A

File Format: PDF/Adobe Acrobat

Descriptor, Interface Descriptor, **Endpoint** Descriptor, and **Hub** Descriptor. These

... Endpoint1, an interrupt **endpoint**, is used by the **Hub** Controller to send ...

www.atmel.com/dyn/resources/prod_documents/doc1255.pdf - [Similar pages](#)

[sane-devel] Re: fi-4110CU

... bNumEndpoints 1 bInterfaceClass 9 **Hub** bInterfaceSubClass 0=20 bInterfaceProtocol

0=20 iInterface 2 Gateway USB **Hub** Keyboard **Endpoint** Descriptor: bLength ...

lists.alioth.debian.org/pipermail/sane-devel/2004-April/010886.html - 16k - [Cached](#) - [Similar pages](#)

Endpoint Networks - Home Page -

Endpoint Networks is a Contact Management, CRM and Network consulting ...

Network router, **hub**, network, IP address, server, workstation, monitor, network card ...

www.endpointnet.com/ - 17k - [Cached](#) - [Similar pages](#)

Circuit Cellar - Digital Library

... from the host to either a device or **hub**. **Endpoint**—an address inside a USB device.

... **Endpoint** descriptor—describes the direction and attributes of the ...

www.circuitcellar.com/library/designforum/hints/hint9/index.asp - 58k - [Cached](#) - [Similar pages](#)



[Web](#) [Images](#) [Groups](#) [News](#) [Froogle](#) [Local](#)^{New!} [more »](#)

endpoint hub

Search

[Advanced Search](#)
[Preferences](#)

Web

Results 31 - 40 of about 171,000 for endpoint hub. (0.38 seconds)

[PDF] [Product Preview USB Hub Controller MC141555 FreescaleSemiconducto ...](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

The additional **endpoint** 1 of the **Hub** Controller supports interrupt transfer ...

The **Hub** Controller will respond to the HOST Request through the **endpoint** 0 ...

www.freescale.com/files/microcontrollers/doc/data_sheet/MC141555.pdf - [Similar pages](#)

[iSoft Corporation](#)

iSoft Secure Connect is pre-configured at the **hub** and distributed via ... Once the pre-configured installation completes and the **endpoint** launches the ...

www.isoft.com/secure_connect.php - 24k - [Cached](#) - [Similar pages](#)

[Power Integrations - PoE Applications](#)

Endpoint (or **Endpoint** PSE) refers to an Ethernet switch or **hub** which is equipped to inject PoE power onto the Ethernet cables using either of the data pairs ...

www.powerint.com/poe.htm - 37k - [Cached](#) - [Similar pages](#)

[USB Complete](#)

Each **hub** has an interrupt IN **endpoint** for reporting these events to the host.

On system boot-up, the host polls its root **hub** to learn if any devices are ...

www.lvr.com/usbc.htm - 19k - [Cached](#) - [Similar pages](#)

[Talisen Technologies](#)

Whether that location within the network is an **endpoint**, **hub** site or data center location, the best practices of network engineering are applied. ...

www.talisentech.com/networkservices.html - 10k - [Cached](#) - [Similar pages](#)

[PCI-SIG - PCI Express](#)

Synopsys Inc, **Endpoint** controller IP, CXPL X1, PCIe 1.0a, PCI Express X1 Ethernet ... Intel® 82955X, PCIe 1.0a, Graphics and Memory Controller **Hub** ...

www.pcisig.com/developers/compliance_program/integrators_list/pcie/ - 65k - Nov 5, 2005 - [Cached](#) - [Similar pages](#)

[\[sane-devel\] Re: fi-4110CU](#)

... 0 > bNumEndpoints 1 > bInterfaceClass 9 **Hub** > bInterfaceSubClass 0 >

bInterfaceProtocol 0 > iInterface 2 Gateway USB **Hub** Keyboard > **Endpoint** Descriptor: ...

lists.alth.debian.org/pipermail/sane-devel/2004-April/010887.html - 21k - [Cached](#) - [Similar pages](#)

[Bus 003 Device 001: ID 0000:0000 Device Descriptor: bLength 18 ...](#)

... 1 bcdUSB 1.00 bDeviceClass 9 **Hub** bDeviceSubClass 0 Unused bDeviceProtocol ...

0 Unused bInterfaceProtocol 0 iInterface 0 **Endpoint** Descriptor: bLength 7 ...

research.indocisc.com/~andika/mb02/lsusb-v - 5k - [Cached](#) - [Similar pages](#)

[Universal Serial Bus - Wikipedia, the free encyclopedia](#)

All USB devices have at least two such pipes/endpoints: namely **endpoint** 0 ...

This disallows connection of a bus-powered **hub** to another bus-powered **hub**. ...

en.wikipedia.org/wiki/Universal_Serial_Bus - 60k - [Cached](#) - [Similar pages](#)

[\[PPT\] Choosing an application integration strategy Anko Duizer Class-A](#)

File Format: Microsoft Powerpoint 97 - [View as HTML](#)

Application. **Endpoint**. **Endpoint**. Central **hub**. UI. BO. BO. Data. Application. UI.

BO. BO. Data. Application. **Endpoint**. **Endpoint**. ERP System ...

download.microsoft.com/download/f/6/0/f60bef18-62cf-4e2c-9a9e-62a8b4a52bdd/DevDay2005_AnkoDuizer.ppt - [Similar pages](#)

